azur
551P/651P

Quick Start

How to configure a basic system

Inbetriebnahme für Ungeduldige
Konfigurieren eines einfachen Systems

Démarrage rapide
Comment configurer un système simple

Guía rápida
Cómo configurar un sistema básico

Avvio rapido
Come configurare il sistema di base

Snel starten
Hoe u een basis systeem configureert

Kom hurtigt i gang
Sådan konfigureres et almindeligt system

Быстрая установка
Как сконфигурировать основную канальную систему

Cambridge Audio

Your music + our passion

What's in the box?

Lieferumfang

Que contient la boîte?

Contenido de la caja

Cosa contiene la confezione?

Wat u in de doos zult vinden...

Hvad er der i kassen?

Что в коробке?



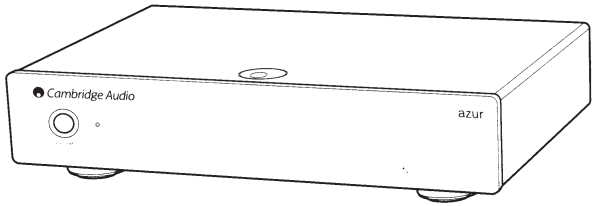

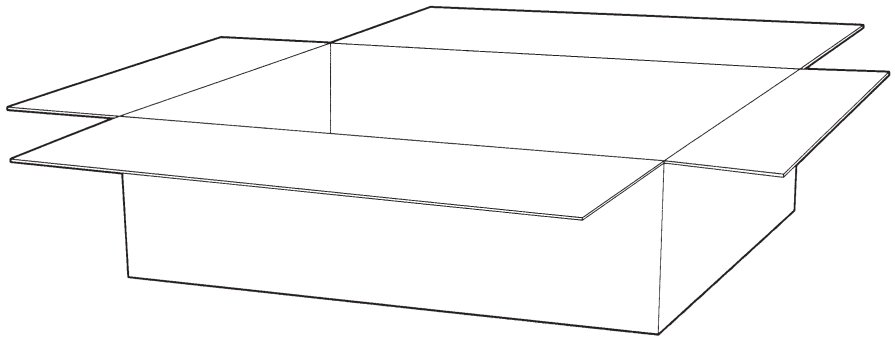

Cambridge Audio

Your music + our passion

Set-up

Einrichtung | **Instalación** | **Configureren** | **Настройка**

Installation | **Impostazioni** | **Opsætning**

azur

1

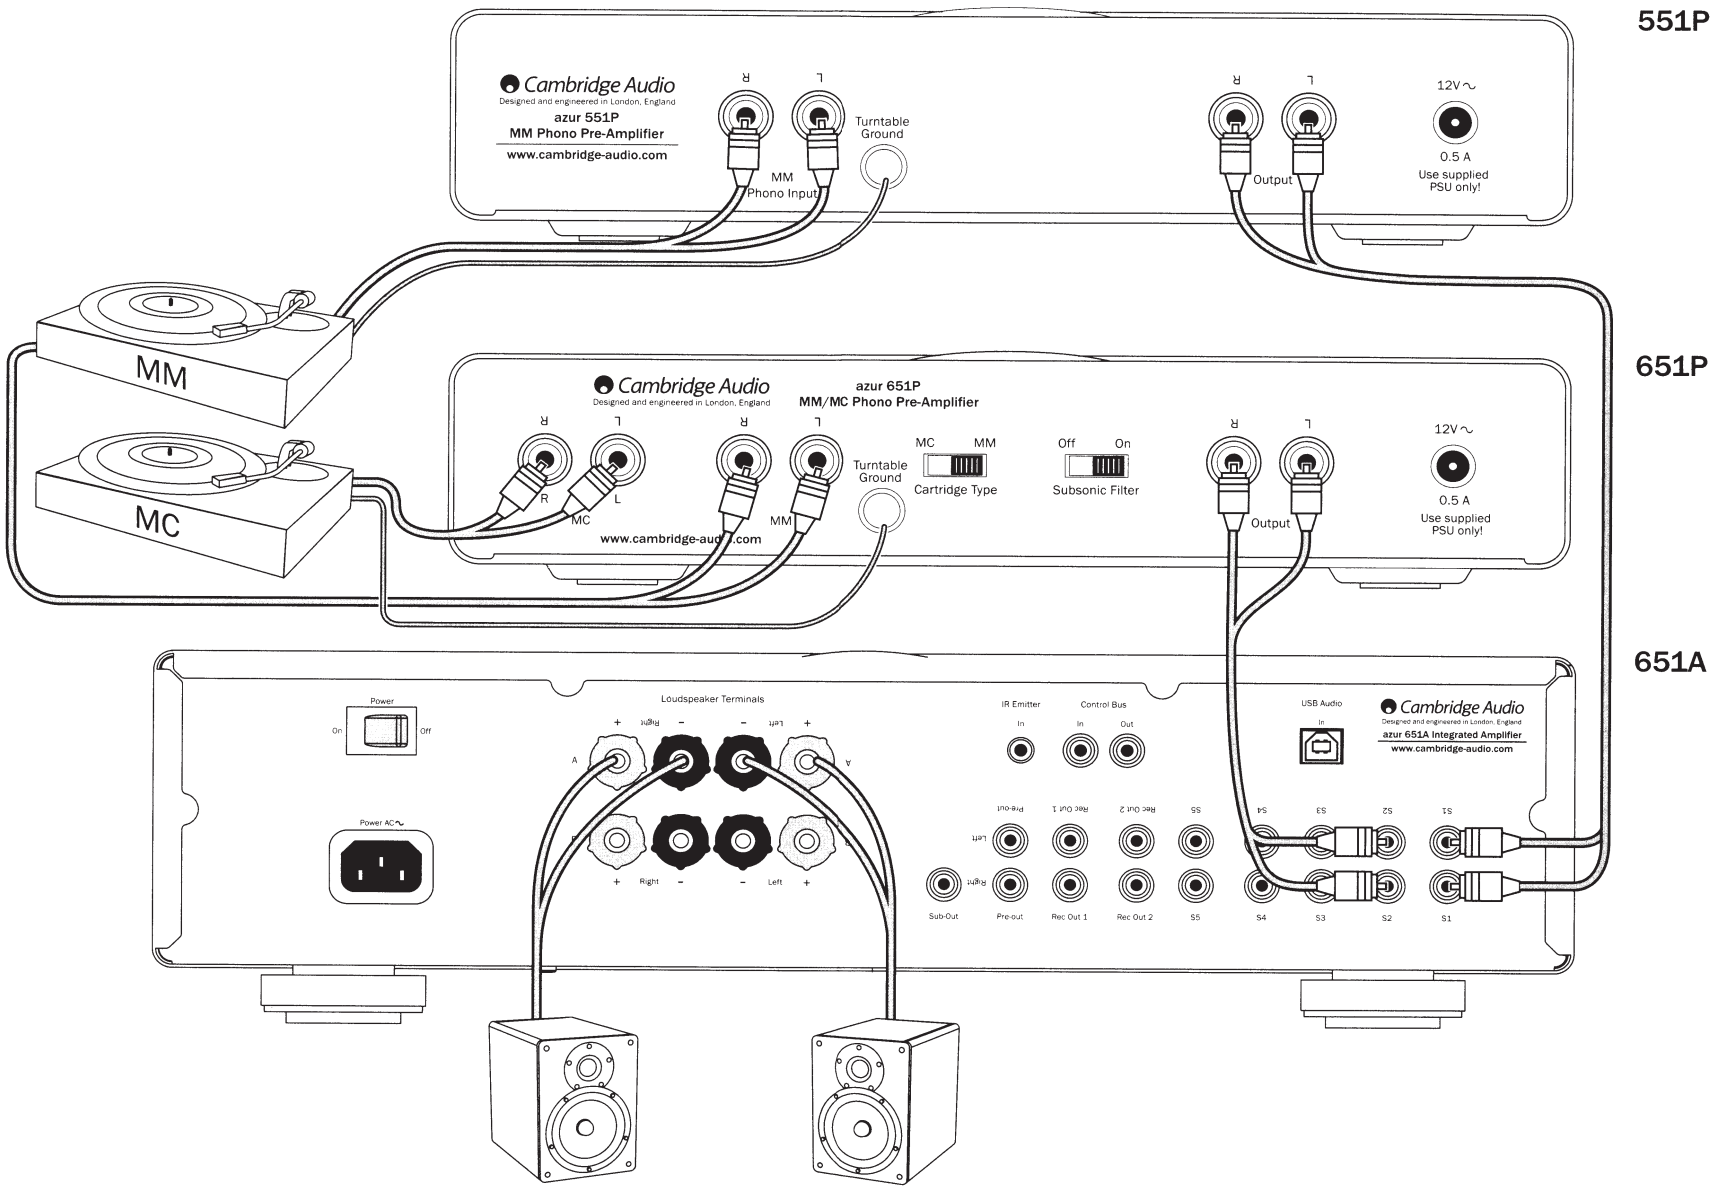

2

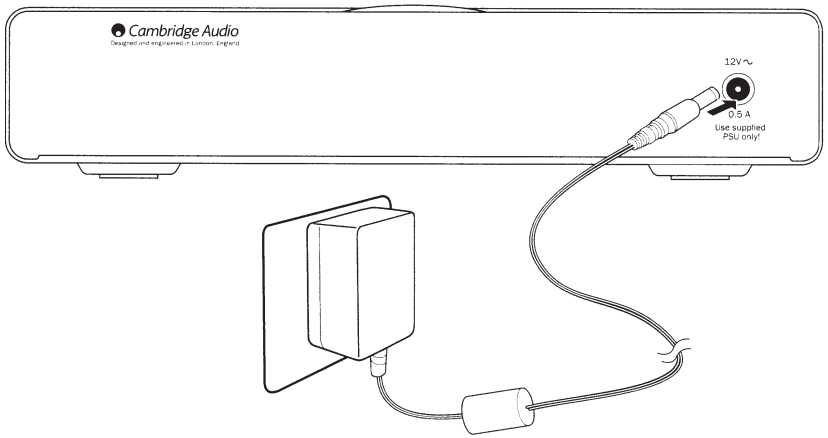

3

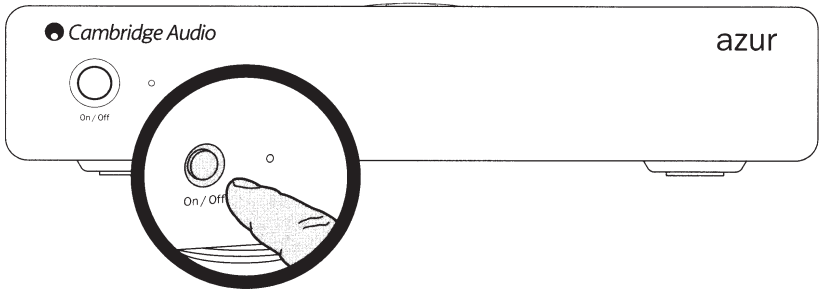

4



To get the best performance from your azur 551P/651P, please read the online manual for more information, visit our website http://www.cambridge-audio.com/.

Um die beste Leistung mit Ihrem Azur 551P/651P zu erzielen, lesen Sie bitte das online Handbuch für weitere Informationen oder besuchen Sie unsere Webseite unter http://www.cambridge-audio.com/.

Afin de profiter au mieux de votre azur 551P/651P, veuillez lire le manuel en ligne pour plus d'information et consulter notre site Web http://www.cambridge-audio.com/.

Para conseguir el máximo rendimiento de tu azur 551P/651P, por favor para más información, lee el manual en línea, visita nuestro sitio web http://www.cambridge-audio.com/.

Al fine di ottenere prestazioni ottimali dal dispositivo azur 551P/651P, leggere il manuale on-line per maggiori informazioni oppure visitare il nostro sito web all'indirizzo http://www.cambridge-audio.com/.

Lees om de beste prestaties van uw azur 551P/651P te krijgen voor meer informatie de online handleiding op onze website http://www.cambridge-audio.com/.

Få bästa prestanda från din azur 551P/651P genom att läsa onlinehandboken för mer information, besök vår webbplats på http://www.cambridge-audio.com/.

Для достижения оптимальных результатов при использовании azur 551P/651P ознакомьтесь с подробной информацией в онлайновом руководстве на нашем веб-сайте по адресу http://www.cambridge-audio.com/.

Cambridge Audio

Your music + our passion

For further information about Cambridge Audio, our products, news, reviews and support, please visit:
www.cambridge-audio.com

Weitere Infos zu Cambridge Audio, unsere Produkte, Neuigkeiten, Testberichte und Kundendienst finden Sie unter:
www.cambridge-audio.com

Pour obtenir des informations supplémentaires sur Cambridge Audio, nos produits, nouveautés, actualités et assistance, veuillez vous rendre sur notre site :
www.cambridge-audio.com

Para obtener más información acerca de Cambridge Audio, nuestros productos, noticias, reseñas y soporte, visite:
www.cambridge-audio.com

Per maggiori informazioni su Cambridge Audio e i nostri prodotti, per notizie, articoli e assistenza, visitare:
www.cambridge-audio.com

Voor meer informatie over Cambridge Audio, onze producten, nieuws, beoordelingen en support (ondersteuning), kunt u onze website bezoeken:
www.cambridge-audio.com

Du kan finde flere oplysninger om Cambridge Audio, vores produkter, nyheder og support på: www.cambridge-audio.com

Более подробную информацию о компании Cambridge Audio, ее продуктах, новостях, обзорах и технической поддержке см. на веб-сайте:
www.cambridge-audio.com

AP30908/1

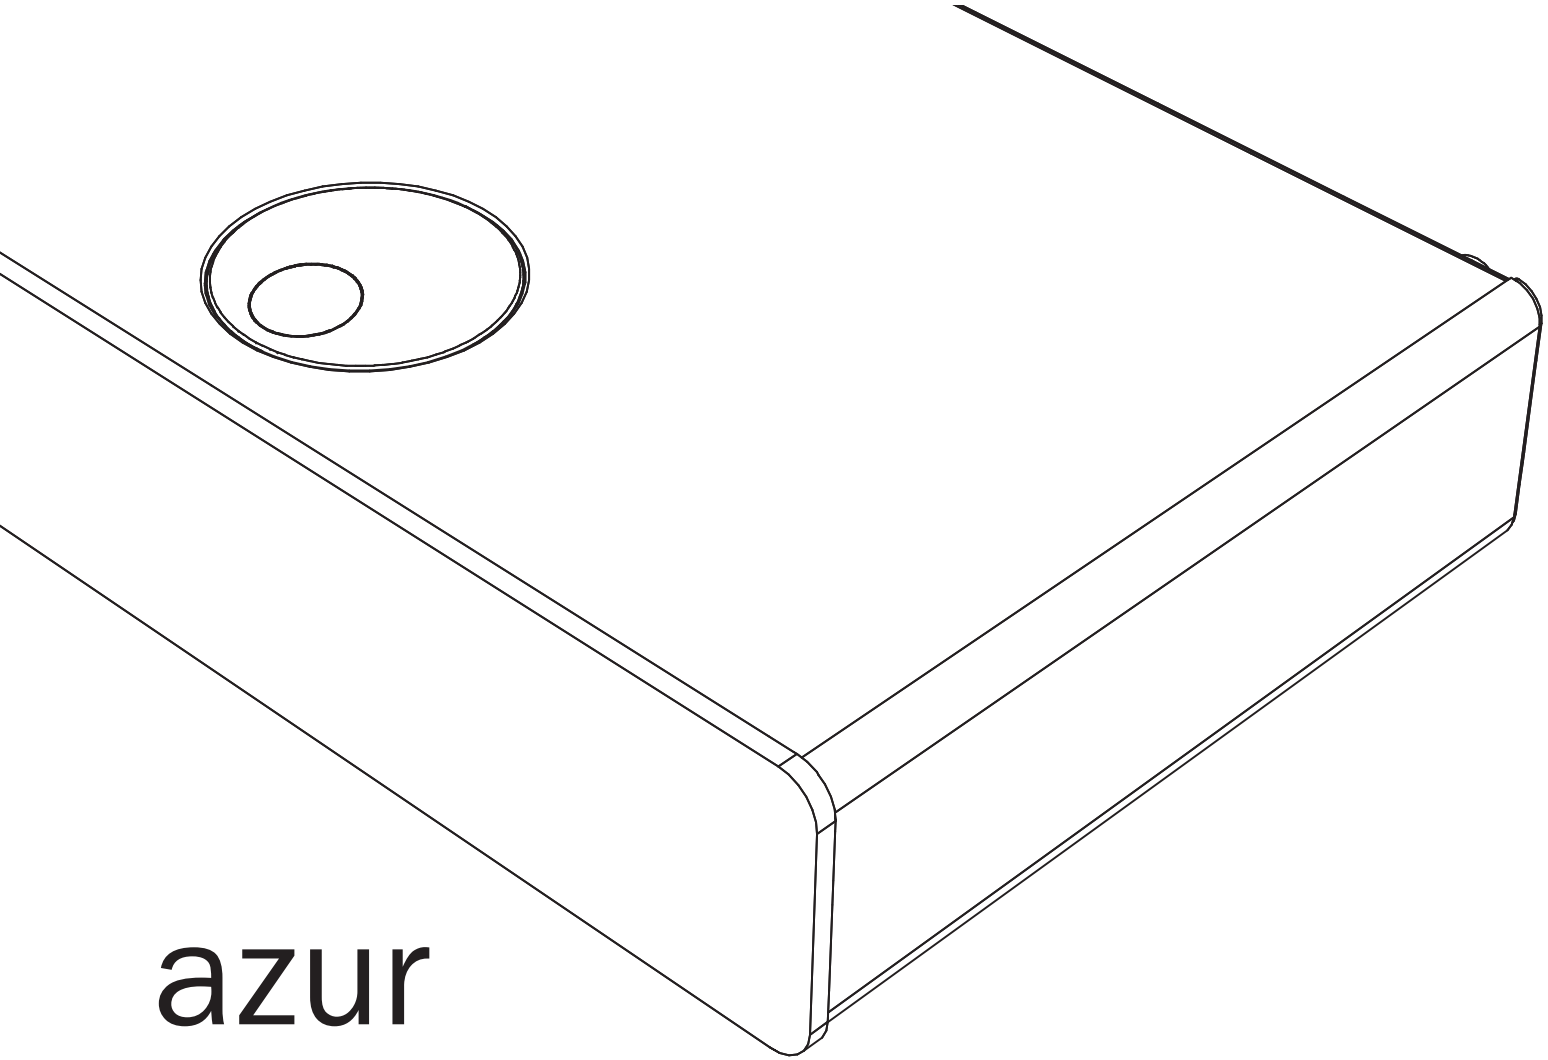

azur

551P/651P

Cambridge Audio

Your music + our passion

Cambridge Audio

Contents

Introduction 3

Important safety instructions 4

Limited warranty 7

Rear panel controls 8

Front panel controls 8

Rear panel connections 9

Technical specifications 10

Troubleshooting 10

Make sure you register your purchase.
Visit: www.cambridge-audio.com/sts

By registering, you'll be the first to know about:

- **Future product releases**
- **Software upgrades**
- **News, events and exclusive offers plus competitions!**

This guide is designed to make installing and using this product as easy as possible. Information in this document has been carefully checked for accuracy at the time of printing; however, Cambridge Audio's policy is one of continuous improvement, therefore design and specifications are subject to change without prior notice.

This document contains proprietary information protected by copyright. All rights are reserved. No part of this manual may be reproduced by any mechanical, electronic or other means, in any form, without prior written permission of the manufacturer. All trademarks and registered trademarks are the property of their respective owners.

© Copyright Cambridge Audio Ltd 2012.

Cambridge Audio and the Cambridge Audio logo are trademarks of Cambridge Audio.

Other brands mentioned are trademarks of their respective owners and are used for reference purposes only.

Introduction

Thank you for purchasing this Cambridge Audio azur series phono pre-amplifier. Like all Cambridge Audio products these phono pre-amplifiers adhere to three core principles – stunning performance, ease of use and incredible value.

The design of a high quality but cost-effective phono pre-amplifer presents a major challenge. Providing first-class performance on an unlimited budget is one matter; achieving the same performance within tight price limits is quite another, and requires all the expertise and experience that Cambridge Audio brings to its product design process. We believe we have succeeded in our aim of creating a first-class affordable product.

The 551P features a moving magnet stage whilst the 651P offers both moving magnet and moving coil stages. Both use low noise discrete transistors for the all-important input stages instead of the more common integrated circuits.

Both are designed to produce high gain and linearity, without requiring massive amounts of negative feedback to achieve low distortion. Both models also employ a single-ended 'Class A' gain stage with audiophile passive RIAA equalisation.

High quality components are used throughout such as 1% metal film resistors and close tolerance polypropylene capacitors.

The 651P uses more exotic amplification circuitry to provide even lower distortion and noise plus a second higher gain stage for MC cartridges. In addition, the 651P employs multi-parallel capacitors to achieve exceptional RIAA accuracy of only 0.3dB up to 50kHz and features a defeatable subsonic filter.

Both units can be switched off from the front panel and feature a very high efficiency external transformer that consumes less than 0.5W when the main unit is switched off.

Thank you for taking the time to read this manual; we do recommend you keep it for future reference.

Matthew Bramble
Cambridge Audio Technical Director
and the 551P/651P design team

Cambridge Audio

Important safety instructions

For your own safety please read the following important safety instructions carefully before attempting to connect this unit to the mains power supply. They will also enable you to get the best performance from and prolong the life of the unit:

1. Read these instructions.
2. Keep these instructions.
3. Heed all warnings.
4. Follow all instructions.
5. Do not use this apparatus near water.
6. Clean only with a dry cloth.
7. Do not block any ventilation openings. Install in accordance with the manufacturer's instructions.
8. Do not install near any heat sources such as radiators, heat registers, stoves, or other apparatus (including amplifiers) that produce heat.
9. Do not defeat the safety purpose of the polarized or grounding-type plug. A polarized plug has two blades with one wider than the other. A grounding-type plug has two blades and a third grounding prong. The wide blade or the third prong are provided for your safety. If the provided plug does not fit into your outlet, consult an electrician for replacement of the obsolete outlet.
10. Protect the power cord from being walked on or pinched, particularly at plugs, convenience receptacles and the point where they exit from the apparatus.
11. Only use attachments/accessories specified by the manufacturer.
12. Use with only the cart, stand, tripod, bracket, or table specified by the manufacturer, or sold with the apparatus. When a cart is used, use caution when moving the cart/ apparatus combination to avoid injury from tip-over.

13. Unplug this apparatus during lightning storms or when unused for long periods of time.
14. Refer all servicing to qualified service personnel. Servicing is required when the apparatus has been damaged in any way, such as the power-supply cord or plug having been damaged, liquid has been spilled or objects have fallen into the apparatus, the apparatus has been exposed to rain or moisture, does not operate normally, or has been dropped.

WARNING

– To reduce the risk of fire or electric shock, do not expose this unit to rain or moisture.

The unit must be installed in a manner that makes disconnection of the mains plug from the mains socket outlet (or appliance connector from the rear of the unit) possible. Where the mains plug is used as the disconnect device, the disconnect device shall remain readily operable. Only use the mains cord supplied with this unit.

Please ensure there is ample ventilation (at least 10cm clearance all round). Do not put any objects on top of this unit. Do not situate it on a rug or other soft surface and do not obstruct any air inlets or outlet grilles. Do not cover the ventilation grilles with items such as newspapers, tablecloths, curtains, etc.

This unit must not be used near water or exposed to dripping or splashing water or other liquids. No objects filled with liquid, such as vases, shall be placed on the unit.

The lightning flash with the arrowhead symbol within an equilateral triangle is intended to alert the user to the presence of un-insulated 'dangerous voltage' within the product's enclosure that may be of sufficient magnitude to constitute a risk of electric shock to persons.

The exclamation point within an equilateral triangle is intended to alert the user to the presence of important operating and maintenance instructions in the service literature relevant to this appliance.

WEEE symbol

The crossed-out wheeled bin is the European Union symbol for indicating separate collection for electrical and electronic equipment. This product contains electrical and electronic equipment which should be reused, recycled or recovered and should not be disposed of with unsorted regular waste. Please return the unit or contact the authorised dealer from whom you purchased this product for more information.

CE mark

This product complies with European Low Voltage (2006/95/EC), Electromagnetic Compatibility (2004/108/EC) and Environmentally-friendly design of Energy-related Products (2009/125/EC) Directives when used and installed according to this instruction manual. For continued compliance only Cambridge Audio accessories should be used with this product and servicing must be referred to qualified service personnel.

C-Tick mark

This product meets the Australian Communications Authority's Radio communications and EMC requirements.

Gost-R Mark

This product meets Russian electronic safety approvals.

FCC regulations

NOTE: THE MANUFACTURER IS NOT RESPONSIBLE FOR ANY RADIO OR TV INTERFERENCE CAUSED BY UNAUTHORIZED MODIFICATIONS TO THIS EQUIPMENT. SUCH MODIFICATIONS COULD VOID THE USER AUTHORITY TO OPERATE THE EQUIPMENT.

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation.

If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Re-orient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Ventilation

IMPORTANT – The unit will become hot when in use. Do not stack multiple units on top of each other. Do not place in an enclosed area such as a bookcase or in a cabinet without sufficient ventilation.

Ensure that small objects do not fall through any ventilation grille. If this happens, switch off immediately, disconnect from the mains supply and contact your dealer for advice.

Positioning

Choose the installation location carefully. Avoid placing it in direct sunlight or close to a source of heat. No naked flame sources, such as lighted candles, should be placed on the unit. Also avoid locations subject to vibration and excessive dust, cold or moisture. The unit can be used in a moderate climate.

This unit must be installed on a sturdy, level surface. Do not place in a sealed area such as a bookcase or in a cabinet. Do not place the unit on an unstable surface or shelf. The unit may fall, causing serious injury to a child or adult as well as serious damage to the product. Do not place other equipment on top of the unit.

Due to stray magnetic fields, turntables or CRT TVs should not be located nearby due to possible interference.

Electronic audio components have a running in period of around a week (if used several hours per day). This will allow the new components to settle down and the sonic properties will improve over this time.

Power sources

The unit should be operated only from the type of power source indicated on the marking label. If you are not sure of the type of power-supply to your home, consult your product dealer or local power company.

To turn the unit off, switch off at the front panel. If you do not intend to use this unit for a long period of time, unplug it from the mains socket.

Overloading

Do not overload wall outlets or extension cords as this can result in a risk of fire or electric shock. Overloaded AC outlets, extension cords, frayed power cords, damaged or cracked wire insulation and broken plugs are dangerous. They may result in a shock or fire hazard.

Be sure to insert each power cord securely. To prevent hum and noise, do not bundle the interconnect leads with the power cord or speaker leads.

Cleaning

To clean the unit, wipe its case with a dry, lint-free cloth. Do not use any cleaning fluids containing alcohol, ammonia or abrasives. Do not spray an aerosol at or near the unit.

Battery disposal

Batteries may contain substances harmful to the environment. Please dispose of any discharged batteries with due consideration and in accordance with local environmental/electronic recycling guidelines.

Loudspeakers

Before making any connections to loudspeakers, make sure all power is turned off and only use suitable interconnects.

Servicing

These units are not user serviceable. Never attempt to repair, disassemble or reconstruct the unit if there seems to be a problem. A serious electric shock could result if this precautionary measure is ignored. In the event of a problem or failure, please contact your dealer.

Limited warranty

Cambridge Audio warrants this product to be free from defects in materials and workmanship (subject to the terms set forth below). Cambridge Audio will repair or replace (at Cambridge Audio's option) this product or any defective parts in this product. Warranty periods may vary from country to country. If in doubt consult your dealer and ensure that you retain proof of purchase.

To obtain warranty service, please contact the Cambridge Audio authorised dealer from which you purchased this product. If your dealer is not equipped to perform the repair of your Cambridge Audio product, it can be returned by your dealer to Cambridge Audio or an authorised Cambridge Audio service agent. You will need to ship this product in either its original packaging or packaging affording an equal degree of protection.

Proof of purchase in the form of a bill of sale or receipted invoice, which is evidence that this product is within the warranty period, must be presented to obtain warranty service.

This Warranty is invalid if (a) the factory-applied serial number has been altered or removed from this product or (b) this product was not purchased from a Cambridge Audio authorised dealer. You may call Cambridge Audio or your local country Cambridge Audio distributor to confirm that you have an unaltered serial number and/or you made a purchase from a Cambridge Audio authorised dealer.

This Warranty does not cover cosmetic damage or damage due to acts of God, accident, misuse, abuse, negligence, commercial use, or modification of, or to any part of, the product. This Warranty does not cover damage due to improper operation, maintenance or installation, or attempted repair by anyone other than Cambridge Audio or a Cambridge Audio dealer, or authorised service agent which is authorised to do Cambridge Audio warranty work. Any unauthorised repairs will void this Warranty. This Warranty does not cover products sold AS IS or WITH ALL FAULTS.

REPAIRS OR REPLACEMENTS AS PROVIDED UNDER THIS WARRANTY ARE THE EXCLUSIVE REMEDY OF THE CONSUMER. CAMBRIDGE AUDIO SHALL NOT BE LIABLE FOR ANY INCIDENTAL OR CONSEQUENTIAL DAMAGES FOR BREACH OF ANY EXPRESS OR IMPLIED WARRANTY IN THIS PRODUCT. EXCEPT TO THE EXTENT PROHIBITED BY LAW, THIS WARRANTY IS EXCLUSIVE AND IN LIEU OF ALL OTHER EXPRESS AND IMPLIED WARRANTIES WHATSOEVER INCLUDING, BUT NOT LIMITED TO, THE WARRANTY OF MERCHANTABILITY AND FITNESS FOR A PRACTICAL PURPOSE.

Some countries and US states do not allow the exclusion or limitation of incidental or consequential damages or implied warranties so the above exclusions may not apply to you. This Warranty gives you specific legal rights, and you may have other statutory rights, which vary from state to state or country to country.

For any service, in or out of warranty, please contact your dealer.

Cambridge Audio

Rear panel controls

551P

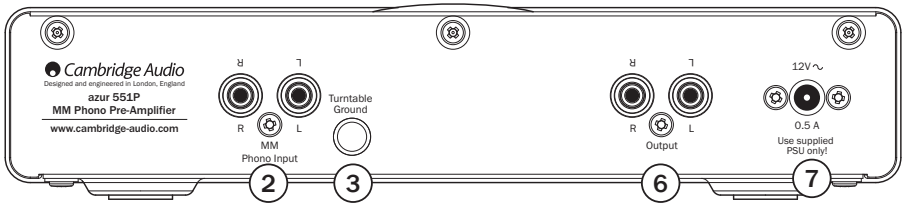

① MC input sockets (651P only)

If your turntable uses a moving coil cartridge, connect outputs here (0.5-1mV, with 100 ohm, 220pF loading).

② MM input sockets

If your turntable uses a moving magnet cartridge, connect outputs here (3-5mV, with 47k ohm, 220pF loading).

③ Turntable ground

If your turntable has a separate grounding lead then connect here. This provides shielding to the arm and the sensitive circuitry in the turntable.

④ Cartridge Type selector switch (651P only)

Match this switch to the cartridge type that your tunrtable uses. MM for a moving magnet cartridge or MC for a moving coil cartridge.

⑤ Subsonic Filter (651P only)

The subsonic filter cuts out very low frequency ‘rumble’, caused by vinyl imperfections, which can affect your system’s performance.

651P

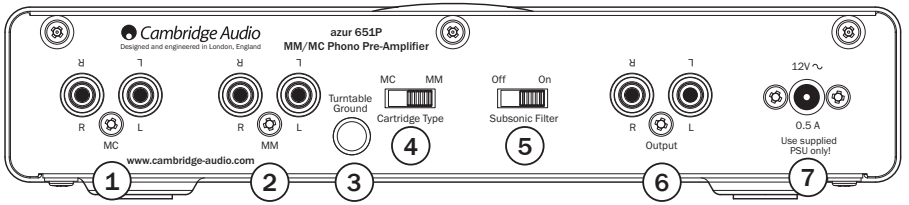

⑥ Output sockets

Use phono cables to connect to any line level input on your amplifier, such as Aux.

NB. Do not connect to a phono level input.

⑦ PSU socket

Once you have completed all connections to the amplifier and turntable, plug the PSU power cable into an appropriate mains socket and switch the unit on via its front panel On/Off button. The blue LED on the front panel will indicate that the power is on.

Please note the 651P has an output relay, which after power on takes 15 seconds to come out of mute.

NB. Only use supplied power supply.

Front panel controls

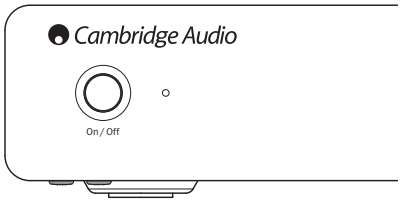

Power on/off

Switches the unit between on and off.

Connections

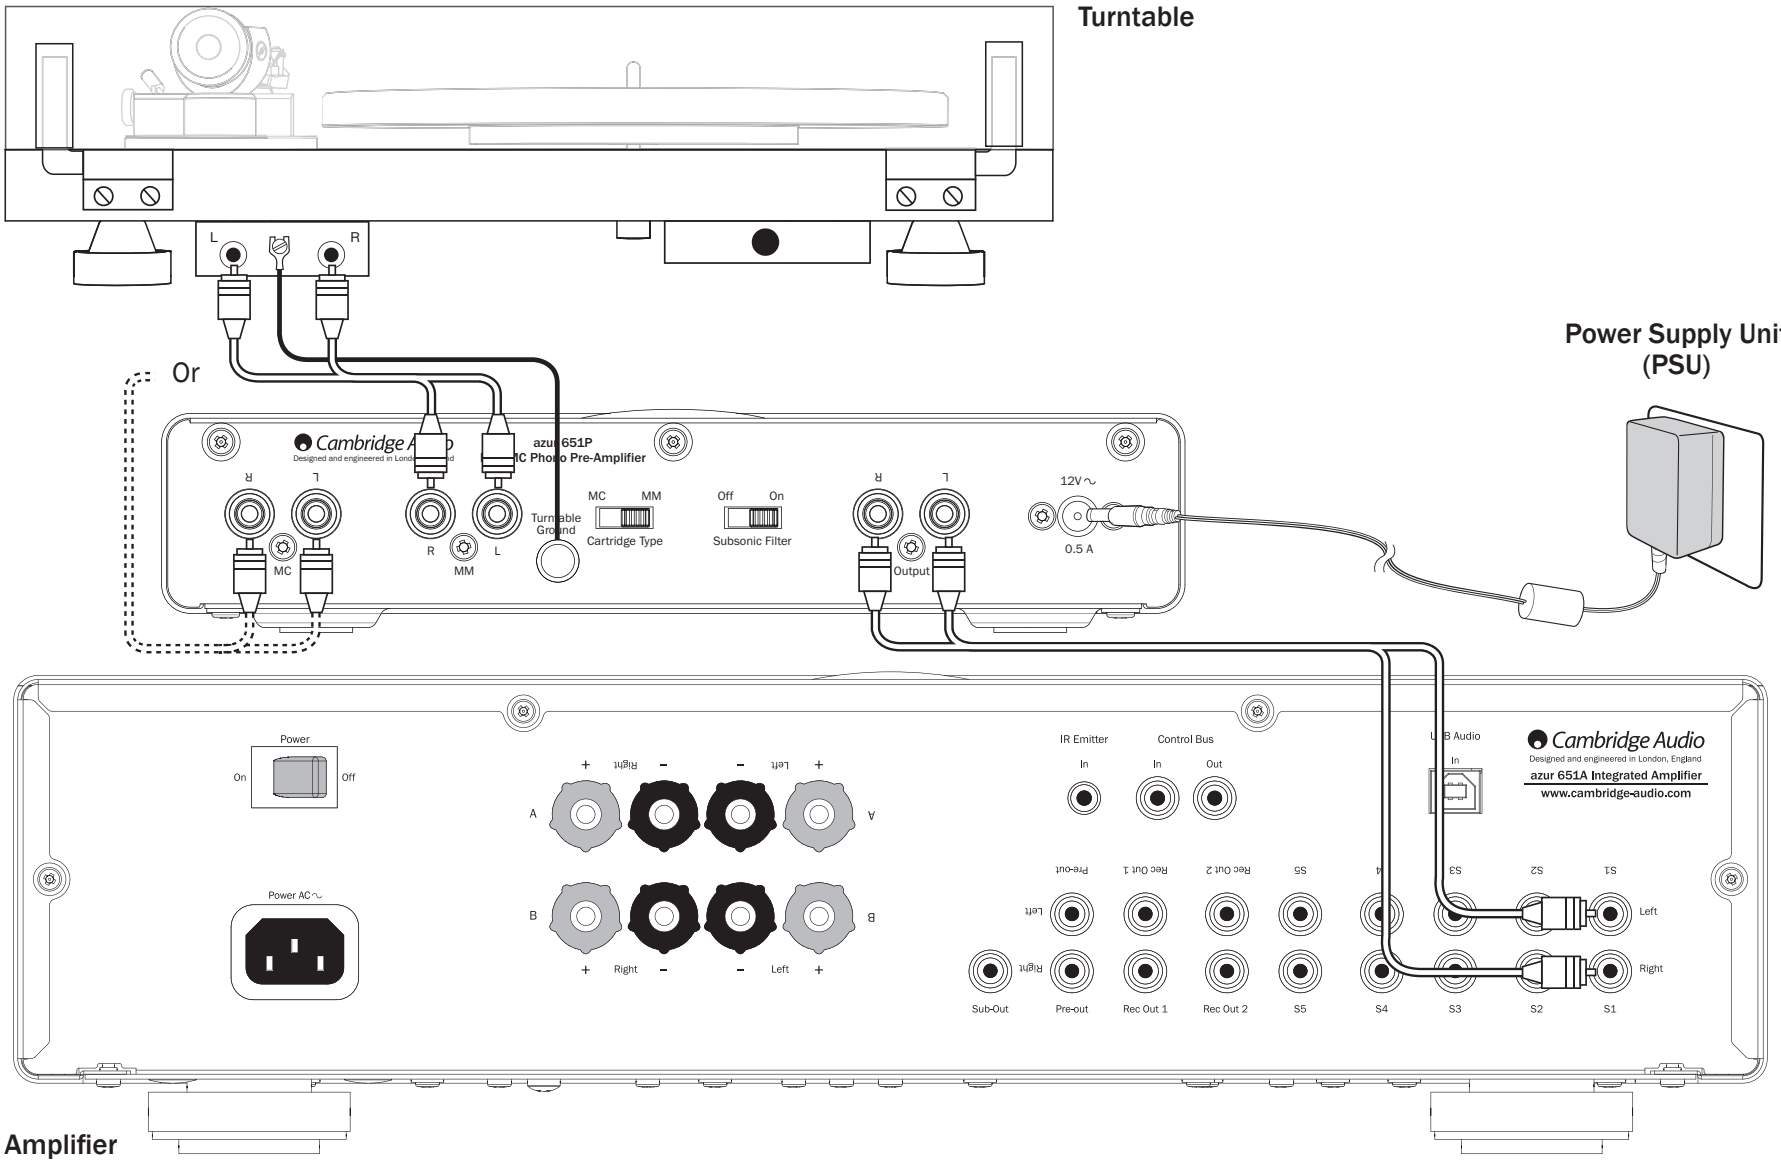

Cambridge Audio

Technical specifications

	551P	651P	
Max power consumption	5W	5W	
PSU consumption in Standby	<0.5W	<0.5W	
		MM	**MC**
Gain @ 1kHz	39dB	39dB	55dB
Nominal output	300mV	300mV	300mV
Sensitivity for nominal output	3.35mV	3.35mV	0.5mV
THD 20Hz-20kHz	<0.009%	<0.005%	<0.002%
RIAA curve accuracy	<+/-0.65dB 25hz-20kHz	<+/-0.3dB 20Hz-50kHz (subsonic filter off)	<+/-0.3dB 20Hz-50kHz
Signal to noise ratio using Audio Precision RIAA-1 with grounded inputs	>85dB	86dB	>72dB
Input impedance	47kOhm	47kOhm	100Ohm
Input capacitance	220pF	220pF	220pF
Overload margin	>30dB	>30dB	>30dB
Crosstalk @ 20kHz	>76dB	>83dB	>69dB
Dimensions (HxWxD)			
mm	46 x 215 x 133	46 x 215 x 133	
inches	1.8 x 8.5 x 5.2	1.8 x 8.5 x 5.2	
Weight			
kg	0.8	0.9	
lbs	1.8	2	

Troubleshooting

There is no power

Ensure the power supply is connected securely to the unit.

Ensure the power supply is fully inserted into the mains socket and it is switched on.

There is no sound

Make sure the unit is plugged in.

Check that your turntable is properly connected.

Check that your speakers are properly connected.

Check all connections are secure and correct amplifier input is selected.

Ensure correct cartridge type has been selected (MM or MC).

There is no sound on one channel

Check that your speakers are properly connected.

Check all connections are secure.

There is a loud buzz or hum

Check turntable or tone arm for ground and connection lead fault.

Ensure no connections are loose or defective.

Ensure that your turntable is not too close to the amplifier.

Volume is too loud/quiet

Check cartridge type matches input type. If a MC cartridge is connected through the MM inputs, volume will be very quiet (and vica versa). Note that it is possible to obtain high level MC cartridges which are designed for an MM input.

In the event that the above solutions do not remedy your problem, please consult our frequently asked questions (FAQ) section on our website: **www.cambridge-audio.com/sts/faqs**

For all servicing, in or out of warranty, please contact your dealer.

Cambridge Audio is a brand of Audio Partnership Plc
Registered Office: Gallery Court, Hankey Place
London SE1 4BB, United Kingdom
Registered in England No. 2953313

www.cambridge-audio.com

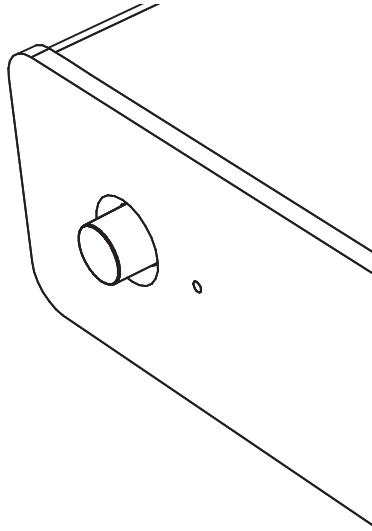

© 2012 Cambridge Audio Ltd

AP30908/1

Technical specifications

Cambridge Audio

Azur 551P phono pre-amplifier

February 2012

- Phono pre-amplifier with moving magnet (MM) input stage
- Acoustically damped full metal chassis with thick brushed aluminium front panel
- Discrete transistors for the all-important input stages instead of the more common integrated circuits
- Single-ended 'Class A' gain stage with audiophile passive RIAA equalisation
- Eco-friendly <1W Standby power consumption
- Available in black and silver finishes

Detailed Specifications

Max power consumption	5W
Gain @ 1kHz	39dB
Input impedance	47kOhm
Input capacitance	220pF
Nominal output	300mV
Sensitivity for nominal output	3.35mV
Overload margin	>30dB
THD 20Hz - 20kHz	<0.009%
RIAA curve accuracy	< +/-0.65dB 25Hz-20kHz
Signal to noise ratio **(using Audio Precision RIAA-1 with grounded inputs)**	>85dB
Crosstalk @ 20kHz	>76dB
Dimensions (H x W x D)	46 x 215 x 133mm 1.8 x 8.5 x 5.2"
Weight	0.8kg 1.8lbs

© Cambridge Audio 2012
Cambridge Audio is a brand of Audio Partnership Plc,
Registered Office: Gallery Court, Hankey Place, London SE1 4BB,
United Kingdom. Registered in England No. 2953313

www.cambridge-audio.com

Cambridge Audio's policy is one of continuous improvement.
Design and specifications are therefore subject to change without prior notice

Cambridge Audio

Azur 551P phono pre-amplifier

Thank you for choosing Cambridge Audio

Cambridge Audio

I ♥

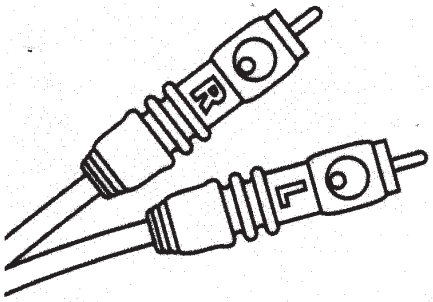

Attention!

This unit does not contain cables

Ask your dealer for advice on which premium cables are best for you.

For optimum system performance use only genuine Cambridge Audio cables.

Designed and engineered with passion in London, England.

All rights reserved © 2011 Cambridge Audio

Cambridge Audio is a brand of Audio Partnership Plc
Registered Office: Gallery Court, Hankey Place,
London SE1 4BB, United Kingdom.
Registered in England No. 2953313

For the very latest, in-depth product information, review coverage, streamed movie presentations and extensive product support, visit:

www.cambridge-audio.com

Cambridge Audio

Power Supply Unit - CU

Input: 120V AC~60Hz

Output: 12V~500mA

LISTED
E140329

GPU411200500WA00

Made under licence in China by

Good Power Electronics Ltd.

CLASS 2 TRANSFORMER

Cambridge Audio

Important safety instructions

Cambridge Audio is a brand of Audio Partnership Plc
Registered Office: Gallery Court, Hankey Place
London SE1 4BB, United Kingdom
Registered in England No. 2953313
www.cambridge-audio.com

For your own safety please read the following important safety instructions carefully before attempting to connect this unit to the mains power supply. They will also enable you to get the best performance from and prolong the life of the unit:

1. Read these instructions.
2. Keep these instructions.
3. Heed all warnings.
4. Follow all instructions.
5. Do not use this apparatus near water.
6. Clean only with a dry cloth.
7. Do not block any ventilation openings. Install in accordance with the manufacturer's instructions.
8. Do not install near any heat sources such as radiators, heat registers, stoves, or other apparatus (including amplifiers) that produce heat.
9. Do not defeat the safety purpose of the polarized or grounding-type plug. A polarized plug has two blades with one wider than the other. A grounding-type plug has two blades and a third grounding prong. The wide blade or the third prong are provided for your safety. If the provided plug does not fit into your outlet, consult an electrician for replacement of the obsolete outlet.
10. Protect the power cord from being walked on or pinched, particularly at plugs, convenience receptacles and the point where they exit from the apparatus.
11. Only use attachments/accessories specified by the manufacturer.
12. Unplug this apparatus during lightning storms or when unused for long periods of time.

13. Refer all servicing to qualified service personnel. Servicing is required when the apparatus has been damaged in any way, such as the power-supply adaptor having been damaged, liquid has been spilled or objects have fallen into the apparatus, the apparatus has been exposed to rain or moisture, does not operate normally, or has been dropped.

WARNING

– To reduce the risk of fire or electric shock, do not expose this unit to rain or moisture.

The unit must be installed in a manner that makes disconnection of the mains adaptor from the mains socket outlet (or appliance connector from the rear of the unit) possible. Where the mains adaptor is used as the disconnect device, the disconnect device shall remain readily operable. Only use the mains adaptor supplied with this unit.

Please ensure there is ample ventilation (at least 10cm clearance all round). Do not put any objects on top of this unit. Do not situate it on a rug or other soft surface and do not obstruct any air inlets or outlet grilles.

This unit must not be used near water or exposed to dripping or splashing water or other liquids. No objects filled with liquid, shall be placed on the unit.

The lightning flash with the arrowhead symbol within an equilateral triangle is intended to alert the user to the presence of un-insulated 'dangerous voltage' within the product's enclosure that may be of sufficient magnitude to constitute a risk of electric shock to persons.

The exclamation point within an equilateral triangle is intended to alert the user to the presence of important operating and maintenance instructions in the service literature relevant to this appliance.



WEEE symbol

The crossed-out wheeled bin is the European Union symbol for indicating separate collection for electrical and electronic equipment. This product contains electrical and electronic equipment which should be reused, recycled or recovered and should not be disposed of with unsorted regular waste. Please return the unit or contact the authorised dealer from whom you purchased this product for more information.

CE mark

This product complies with European Low Voltage (2006/95/EC), Electromagnetic Compatibility (2004/108/EC) and Environmentally-friendly design of Energy-related Products (2009/125/EC) Directives when used and installed according to this instruction manual. For continued compliance only Cambridge Audio accessories should be used with this product and servicing must be referred to qualified service personnel.

C-Tick mark

This product meets the Australian Communications Authority's Radio communications and EMC requirements.

Gost-R mark

This product meets Russian electronic safety approvals.

FCC regulations

NOTE: THE MANUFACTURER IS NOT RESPONSIBLE FOR ANY RADIO OR TV INTERFERENCE CAUSED BY UNAUTHORIZED MODIFICATIONS TO THIS EQUIPMENT. SUCH MODIFICATIONS COULD VOID THE USER AUTHORITY TO OPERATE THE EQUIPMENT.

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation.

If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Re-orient or relocate the receiving antenna.

- Increase the separation between the equipment and receiver.

- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.

- Consult the dealer or an experienced radio/TV technician for help.

Ventilation

IMPORTANT – The unit will become warm when in use. Do not stack multiple units on top of each other. Do not place in an enclosed area such as a bookcase or in a cabinet without sufficient ventilation.

Ensure that small objects do not fall through any ventilation grille. If this happens, switch off immediately, disconnect from the mains supply and contact your dealer for advice.

Positioning

Choose the installation location carefully. Avoid placing it in direct sunlight or close to a source of heat. No naked flame sources, such as lighted candles, should be placed on the unit. Also avoid locations subject to vibration and excessive dust, cold or moisture. The unit can be used in a moderate climate.

This unit must be installed on a sturdy, level surface. Do not place in a sealed area such as a bookcase or in a cabinet. Do not place the unit on an unstable surface or shelf. The unit may fall, causing serious injury to a child or adult as well as serious damage to the product. Do not place other equipment on top of the unit.

Due to stray magnetic fields, turntables or CRT TVs should not be located nearby due to possible interference.

Electronic audio components have a running in period of around a week (if used several hours per day). This will allow the new components to settle down and the sonic properties will improve over this time.

Power sources

The unit should be operated only from the type of power source indicated on the marking label. If you are not sure of the type of power-supply to your home, consult your product dealer or local power company.

To turn the unit off, switch off at the front panel. If you do not intend to use this unit for a long period of time, unplug it from the mains socket.

Overloading

Do not overload wall outlets or extension cords as this can result in a risk of fire or electric shock. Overloaded AC outlets, extension cords, frayed power cords, damaged or cracked wire insulation and broken plugs are dangerous. They may result in a shock or fire hazard.

Be sure to insert each power cord securely. To prevent hum and noise, do not bundle the interconnect leads with the power cord or speaker leads.

Cleaning

To clean the unit, wipe its case with a dry, lint-free cloth. Do not use any cleaning fluids containing alcohol, ammonia or abrasives. Do not spray an aerosol at or near the unit.

Servicing

These units are not user serviceable. Never attempt to repair, disassemble or reconstruct the unit if there seems to be a problem. A serious electric shock could result if this precautionary measure is ignored. In the event of a problem or failure, please contact your dealer.

Limited warranty

Cambridge Audio warrants this product to be free from defects in materials and workmanship (subject to the terms set forth below). Cambridge Audio will repair or replace (at Cambridge Audio's option) this product or any defective parts in this product. Warranty periods may vary from country to country. If in doubt consult your dealer and ensure that you retain proof of purchase.

To obtain warranty service, please contact the Cambridge Audio authorised dealer from which you purchased this product. If your dealer is not equipped to perform the repair of your Cambridge Audio product, it can be returned by your dealer to Cambridge Audio or an authorised Cambridge Audio service agent. You will need to ship this product in either its original packaging or packaging affording an equal degree of protection.

Proof of purchase in the form of a bill of sale or receipted invoice, which is evidence that this product is within the warranty period, must be presented to obtain warranty service.

This Warranty is invalid if (a) the factory-applied serial number has been altered or removed from this product or (b) this product was not purchased from a Cambridge Audio authorised dealer. You may call Cambridge Audio or your local country Cambridge Audio distributor to confirm that you have an unaltered serial number and/or you made a purchase from a Cambridge Audio authorised dealer.

This Warranty does not cover cosmetic damage or damage due to acts of God, accident, misuse, abuse, negligence, commercial use, or modification of, or to any part of, the product. This Warranty does not cover damage due to improper operation, maintenance or installation, or attempted repair by anyone other than Cambridge Audio or a Cambridge Audio dealer, or authorised service agent which is authorised to do Cambridge Audio warranty work. Any unauthorised repairs will void this Warranty. This Warranty does not cover products sold AS IS or WITH ALL FAULTS.

REPAIRS OR REPLACEMENTS AS PROVIDED UNDER THIS WARRANTY ARE THE EXCLUSIVE REMEDY OF THE CONSUMER. CAMBRIDGE AUDIO SHALL NOT BE LIABLE FOR ANY INCIDENTAL OR CONSEQUENTIAL DAMAGES FOR BREACH OF ANY EXPRESS OR IMPLIED WARRANTY IN THIS PRODUCT. EXCEPT TO THE EXTENT PROHIBITED BY LAW, THIS WARRANTY IS EXCLUSIVE AND IN LIEU OF ALL OTHER EXPRESS AND IMPLIED WARRANTIES WHATSOEVER INCLUDING, BUT NOT LIMITED TO, THE WARRANTY OF MERCHANTABILITY AND FITNESS FOR A PRACTICAL PURPOSE.

Some countries and US states do not allow the exclusion or limitation of incidental or consequential damages or implied warranties so the above exclusions may not apply to you. This Warranty gives you specific legal rights, and you may have other statutory rights, which vary from state to state or country to country.

For any service, in or out of warranty, please contact your dealer.

Plug fitting instructions (UK only)

The cord supplied with this appliance is factory-fitted with a UK mains plug fitted with a 5-amp fuse inside. If it is necessary to change the fuse, it is important that a 5-amp fuse is used. If the plug needs to be changed because it is not suitable for your socket, or becomes damaged, it should be cut off and an appropriate plug fitted following the wiring instructions below. The plug must then be disposed of safely, as insertion into a mains socket is likely to cause an electrical hazard. Should it be necessary to fit a 3-pin BS mains plug to the power cord, the wires should be fitted as shown in this diagram. The colours of the wires in the mains lead of this appliance may not correspond with the coloured markings identifying the terminals in your plug. Connect them as follows:

The wire which is coloured BLUE must be connected to the terminal which is marked with the letter 'N' or coloured BLACK.

The wire which is coloured BROWN must be connected to the terminal which is marked with the letter 'L' or coloured RED.

The wire which is coloured GREEN/YELLOW must be connected to the terminal which is marked with the letter 'E' or coloured GREEN.

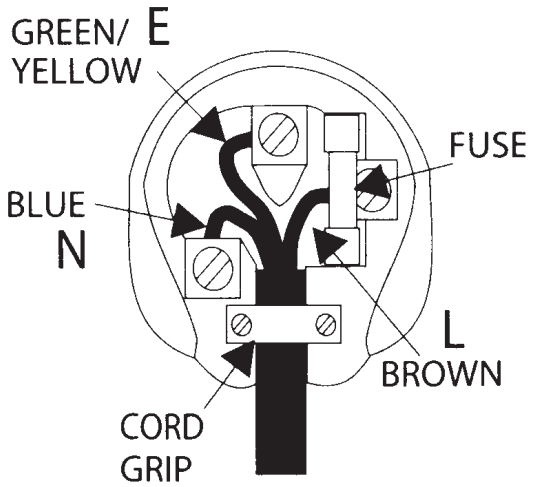

If a standard 13-amp (BS 1363) plug is used, a 5-amp fuse must be fitted or, if any other type of plug is used, a 5-amp fuse must be fitted, either in the plug or adaptor, or on the distribution board.